



# Farettistica




## MARCATURE DI QUALITA' E SICUREZZA

All'interno del catalogo è stato riportato solo il marchio C€,  
marcatore per la conformità alle direttive europee.

Per informazioni sulle ulteriori marcature esistenti sui  
prodotti, i nostri uffici sono a vostra completa disposizione.

# HALL

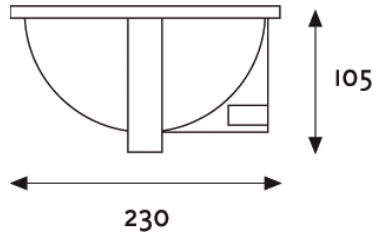


**Faro fisso con 2 portalampade**  
 Fix downlighter with 2 lampholders

Possibilità inserimento lampada a basso consumo  
 Low energy bulb available

Power	2x23W	230V
Cut hole		210 mm
Lamp	E27	100°
Imballo	10 pz	
Material	Metal	
IP Rating	IP 21	




## HALL SQUARE

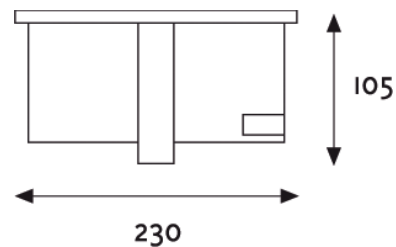


Power	2x23W	230V
Cut hole		215 x 215 mm
Lamp	E27	100°
Imballo	10 pz	
Material	Metal	
IP Rating	IP 21	

Faro fisso con 2 portalampane  
Fix downlighter with 2 lampholders

Possibilità inserimento lampada a basso consumo  
Low energy bulb available



## MINIHALL

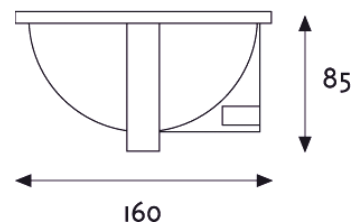


Power	2x9W	230V
Cut hole		145 mm
Lamp	E27	100°
Imballo	20 pz	
Material	Metal	
IP Rating	IP 21	





Faro fisso con 2 portalampade  
Fix downlighter with 2 lampholders

Possibilità inserimento lampada a basso consumo  
Low energy bulb available

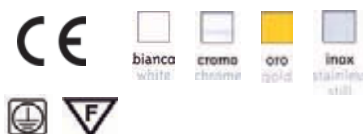

## MINIHALL SQUARE

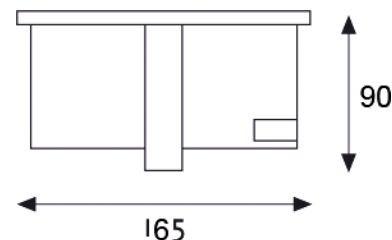


Power	2x9W	230V
Cut hole		150 x 150 mm
Lamp	E27	100°
Imballo	20 pz	
Material	Metal	
IP Rating	IP 21	





Faro fisso con 2 portalampade  
Fix downlighter with 2 lampholders


Possibilità inserimento lampada a basso consumo  
Low energy bulb available



**DIK FIX 12V**  
**DIK FIX 230V**

**Faretto alogeno dicroico da incasso**  
Recessed downlight for dichroic lamp


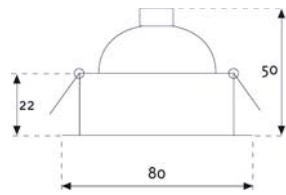


Power	20-50W	12V   230V
Cut hole		65 mm
Cable	140 mm	
Lamp 12V	Halogen dichroic	G5,3 Diam. 50mm
Lamp 230V	Halogen dichroic	GU10 Diam. 50mm
Material	Metal	
IP Rating	IP 20	



**DIK OR 12V**  
**DIK OR 230V**

**Faretto alogeno orientabile dicroico da incasso**  
Adjustable recessed downlight for dichroic lamp


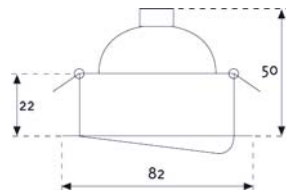


Power	20-50W	12V   230V
Cut hole		75 mm
Cable	140 mm	
Lamp 12V	Halogen dichroic	G5,3 Diam. 50mm
Lamp 230V	Halogen dichroic	GU10 Diam. 50mm
Material	Metal	
IP Rating	IP 20	



**DIKOR SQUARE 12V**  
**DIKOR SQUARE 230V**

**Faretto alogeno orientabile dicroico da incasso**  
Adjustable recessed downlight for dichroic lamp

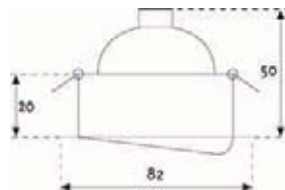


Power	20-50W	12V   230V
Cut hole		75 mm
Cable	140 mm	
Lamp 12V	Halogen dichroic	G5,3 Diam. 50mm
Lamp 230V	Halogen dichroic	GU10 Diam. 50mm
Material	Metal	
IP Rating	IP 20	




## F20LV

### Faretto alogeno da incasso con vetro protettivo

Halogen downlight recessed with protective glass

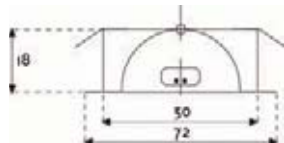


Power	10-20W	12V
Cut hole	 55 mm	
Cable	140 mm	
Lamp	Halogen G4	
Material	Metal	
IP Rating	IP 20	



## F20AV

### Faretto alogeno da incasso con vetro protettivo

Recessed halogen downlight with protective glass

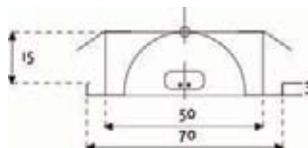


optional  
AS



Distanziale per montaggio in superficie  
Surface mounting spacer




Power	10-20W	12V
Cut hole	 55 mm	
Cable	140 mm	
Lamp	Halogen G4	
Material	Thermoplastic	
IP Rating	IP 20	



## DIK OR35

### Faretto alogeno dicroico da incasso orientabile

Recessed adjustable downlight for dichroic lamp

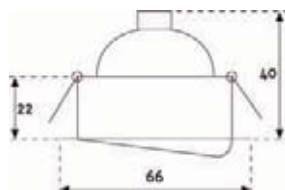



Power	20-35W	12V
Cut hole	 57 mm	
Cable	140 mm	
Lamp	Halogen dichroic G5,3 Diam. 35mm	
Material	Metal	
IP Rating	IP 20	



## MINIOR



Faretto alogeno orientabile  
Adjustable halogen downlight




Power	20W	12V
Cut hole		45 mm
Cable	140 mm	
Lamp	Halogen	G4
Material	Metal	
IP Rating	IP 20	



## TNX



Faretto alogeno  
Halogen downlight



fissaggio con viti  
mounting by screws





Power	20W	12V
Optional	Interruttore integrato Recessed integrated switch	
Cable	140 mm	AMP
Lamp	Halogen	
Material	Metal	
IP Rating	IP 20	



## PUNTO



Faretto alogeno  
Halogen downlight




Power	10-20W	12V
Cut hole		27 mm
Cable	140 mm	
Lamp	Halogen	G4
Material	Metal	
IP Rating	IP 20	



## ALO SWITCH

Faretto con interruttore  
Switched surface mounting downlight


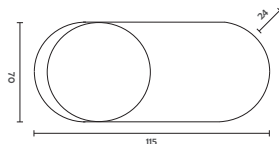


### Specification

Power	20W 12V
Lamp	Halogen G4
Cable	2 mt + connector AMP
Material	Thermoplastic
IP Rating	IP 20

## F20MN


Faretto alogeno  
Halogen downlight

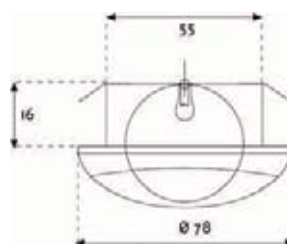

Power	20W 12V
Cut hole	60 mm
Cable	140 mm
Lamp	Halogen G4
Material	Metal
IP Rating	IP 20

## ALOBAR

Plafoniera alogena  
Halogen light fitting

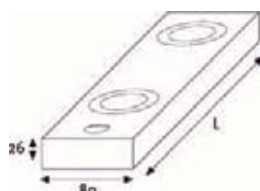


Power	230V
Optional	Sensore
	Sensor
Cable	1500 mm
Lamp	Halogen G4
Material	Metal
IP Rating	IP 20

Watt	L
1x20W	380 mm
2x20W	600 mm
3x20W	900 mm
4x20W	1200 mm

## CIGNO


Applique alogena dicroica con snodo  
Applique for dichroic lamp with articulated joint

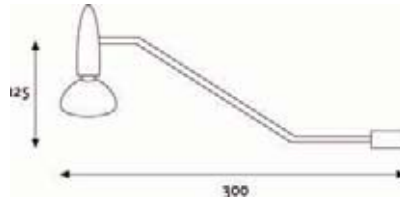

fissaggio con viti  
mounting by screws




Power	12V MAX 20W
Cable	140 mm
Lamp	Halogen G5,3
Material	Metal
IP Rating	IP 20



## NEW CIGNO

Applique alogena dicroica con snodo  
Applique for dichroic lamp with articulated joint

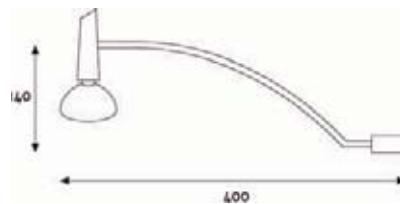

fissaggio con viti  
mounting by screws




Power	12V MAX 20W
Cable	140 mm
Lamp	Halogen G5,3
Material	Metal
IP Rating	IP 20



## SLALOM


Applique alogena dicroica con snodo  
Applique for dichroic lamp with articulated joint

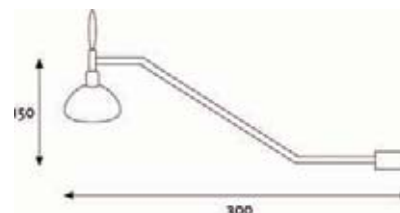


fissaggio con viti  
mounting by screws



Power	12V MAX 20W
Cable	140 mm
Lamp	Halogen G5,3
Material	Metal
IP Rating	IP 20




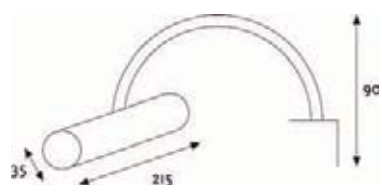
# GP60

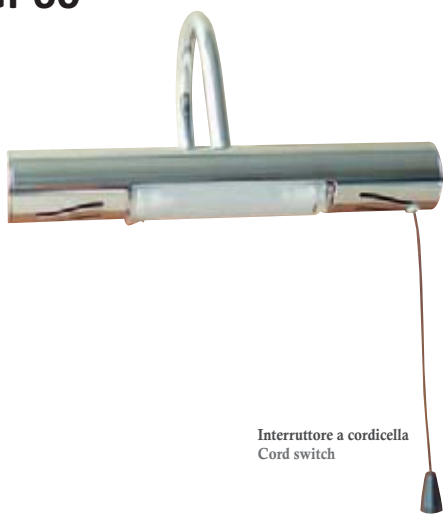

Interruttore a cordicella  
Cord switch

## Applique alogena Halogen light fitting

fissaggio con viti  
mounting by screws 




Power	60W 230V
Cable	140 mm
Lamp	Halogen R7S
Material	Metal
IP Rating	IP 20




# BRANT



## Applique (base fissaggio a muro) Light fitting (fixing wall base)


fissaggio con viti  
mounting by screws 

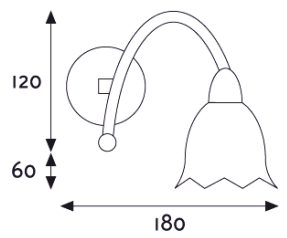

colori vetro  
glass colours  ghiaccio  
frost

Power	40W 230V
Cable	140 mm
Lamp	(No lamp) E14
Material	Metal
IP Rating	IP 20



fissaggio con viti  
mounting by screws 




Faretto compatto  
Compact downlight


## FS7-SU



## FS7-SI




## FS7-IN




Power	9W 230V
Versions	Superficie, semincasso, incasso totale
	Surface, semirecessed, complete recessed
Lamp	Fluorescent GX53
Material	Thermoplastic
IP Rating	IP 20

### Light colours

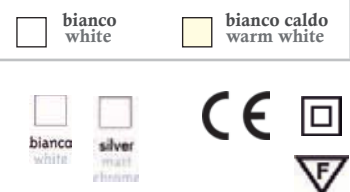

## PT5

Plafoniera per lampade fluorescenti  
Light fitting for fluorescent lamp



Collegabile in continuo MAX 100W  
It can be linked together 100W MAX

Accessori inclusi nel set:  
Accessories included in the set



180cm



30cm




Power	230V
Light	6400°K Standard
	3000°K Optional
Cable	1800 mm
Lamp	Fluorescent T5
Material	Thermoplastic
IP Rating	IP 20



Watt	L	Imballo
6W	270mm	30 pz
8W	345mm	30 pz
13W	570mm	30 pz
21W	910mm	20 pz
28W	1210mm	20 pz
35W	1500mm	20 pz

## MINIFLUO

Plafoniera per lampade fluorescenti  
Halogen light fitting for fluorescent lamp

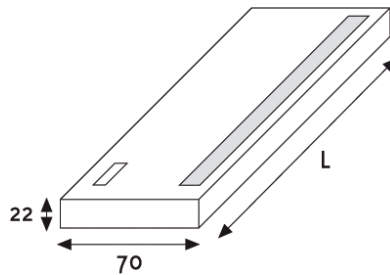

Collegabile in continuo MAX 100W  
It can be linked together 100W MAX

Accessori inclusi nel set:  
Accessories included in the set



180cm



Power	8W - 13W 230V
Light	6400°K Standard
	3000°K Optional
Lamp	Fluorescent T5
Material	Thermoplastic
IP Rating	IP 20



Watt	L	Imballo
8W	350mm	20 pz
13W	552mm	20 pz



**L8** Plafoniera per lampade fluorescenti  
**L13** Light fitting for fluorescent lamp



Power	8W - 13W 230V
Cable	1800 mm
Lamp	Fluorescent T5
Material	Metal
IP Rating	IP 20

Watt	L
8W	340mm
13W	570mm

**L8/P** con presa 230V  
**L13/P** with socket 230V


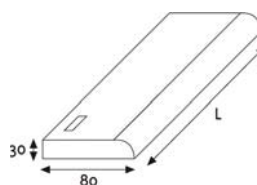


**FLUO INCASSO**



**Fluorescente incasso**  
 Recessed fluorescent

Alimentatore esterno incluso 230V  
 External ballast inclusive 230V



Watt	L
11W	470mm
13W	570mm

Power	11W - 13W
Cable	1800 mm
Lamp	Fluorescent T2
Material	Metal
IP Rating	IP 20



## E2004

Plafoniera da parete o soffitto per esterno  
Wall or ceiling lamp for outdoor



Technical data	
Wide	270mm
High	150mm
Depth	100mm
Weight	0,40Kg

Power	Max 60W	230V
Diffuser	Opal polycarbonate	
Lamp	E27	
Material	Thermoplastic	
IP Rating	IP 65	



## E095

Plafoniera da parete per esterno  
Wall lamp for outdoor



Technical data	
Wide	260mm
High	140mm
Depth	95mm
Weight	0,93Kg

Power	Max 60W	230V
Diffuser	Clear or sandblasted prismatic glass	
Lamp	E27	
Material	Thermoplastic	
IP Rating	IP 44	



## E2001

Plafoniera da soffitto o da parete per esterno  
Wall or ceiling lamp for outdoor




Technical data	
Diameter	270mm
Depth	90mm
Weight	0,50Kg

Power	Max 75W	230V
Diffuser	Opal polycarbonate	
Lamp	E27	
Material	Thermoplastic	
IP Rating	IP 54	



## SPG

### Proiettore con picchetto Spot light with bracket




Power	50W 230V
Cable	280cm
Lamp	Halogen G5,3
Material	Thermoplastic
IP Rating	IP 66



## SUB

### Proiettore con picchetto subaqueo Underwater spot light with bracket



Power	50W 12V
Cable	280cm + 280cm
Lamp	Halogen G5,3
Material	Thermoplastic
IP Rating	IP 68

Trasformatore esterno (non subaqueo)  
External transformer (not underwater)

